



ACD-RM SERIES

Remote Mounted - Zero Loss- Condensate Drain

208


Max L/hr

85-175 psi

Pressure Range

0.5°C - 60°C

Temperature Range

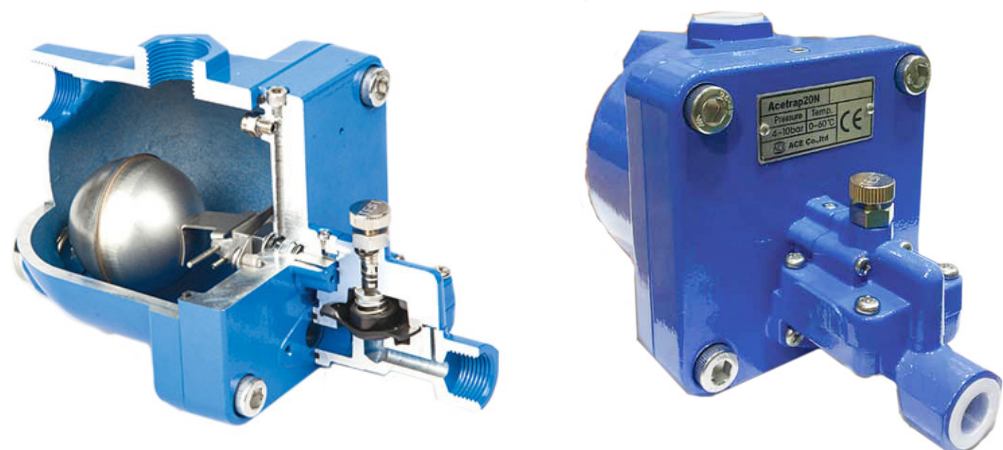

Model	Inlet Port (BSP)	Discharge Port (BSP)	PSI	Temp Range (°C)	Dimensions (L x W x H)	Max L/hr
ACD-RM	1/2"	3/8"	85-175	0.5-60	186 x 80 x 105	208

Description

Moisture in air systems destroys equipment costs and you thousands.

The ACD-RM Zero Loss-Remote Mount Condensate Drain eliminates moisture that collects in your Air System, with Zero Air Loss.

Mounted remotely the ACD-RM Condensate Drain allows you to ensure high quality air supply without taking up excess space.

Additional Features Include:

- Large Inlet and Discharge Ports for maximum flow.
- Test button for testing Float Valve Operation.
- Stainless Steel Float protects the drain from corrosion and rust ensuring long operating life.
- Mechanically operated.

Applications

- Air Compressors
- Aftercoolers
- Cyclonic Separators
- Air Receivers
- Air Dryers
- Air Filters